WEISER®

SMARTCODE™

TOUCHPAD ELECTRONIC DEADBOLT

SMARTKEY SECURITY™

Introducing the newly re-designed SmartCode™ touchpad electronic deadbolt with touchpad tactile feedback and bright LED illumination for easy code access. This new keyless entry deadbolt is faster and quieter than previous models, while allowing you to enter your home using a personal code—the motorized deadbolt locks with just the push of a button.

Featuring in both a traditional and contemporary design that will complement any home decor.

Features

- The responsive touchpad offers sleek style with a large and bright LED to communicate lock status
- New fast and quiet motorized deadbolt
- Auto-locking after 30 seconds or select custom auto-lock time delay
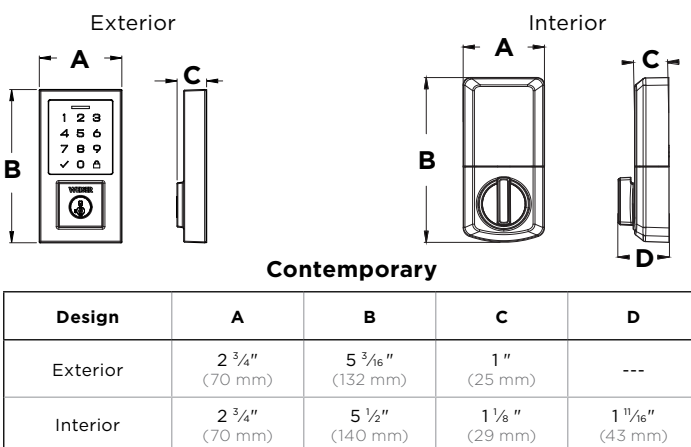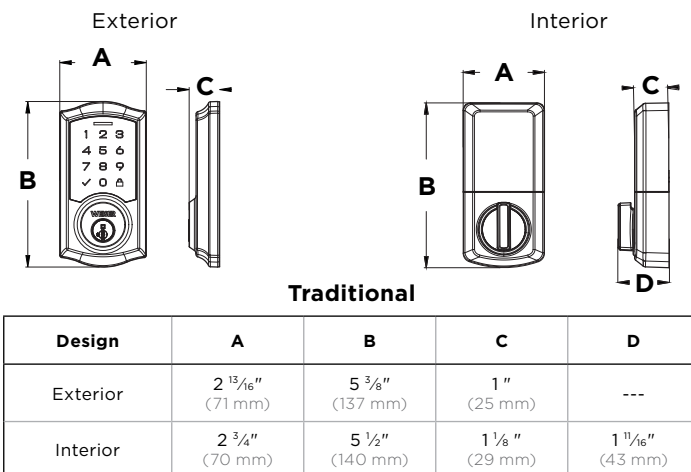
User Codes

- Up to 50 user access codes for family & guests
- Optional Programming Code for improved access code management

Specifications

Battery	Uses 4 x AA 6V alkaline cell batteries with approximately 1 year battery life
Function	Single cylinder deadbolt
Door Prep	1 ½″ (38mm) or 2 ⅛″ (54mm) diameter cross bore hole and 1″ diameter edge bore hole
Backset	Adjustable 2 ⅜″ (60mm) or 2 ¾″ (70mm)
Door Thickness	1 ⅜″ (35mm) to 1 ¾″ (44mm) standard. Thick door service part available for 2-1/4" (57mm) thick doors.
Faceplates	1″ (25 mm) x 2 ¼″ (57 mm) square corner faceplate with drive-in collar standard
Strikes	2 ¾″ (70mm) x 1 ⅛″ (29mm) square corner 4 hole strike
Bolt	1″ (25mm) throw, steel bolt with anti-saw security pin
Door Handing	Reversible
Cylinder	SmartKey Security™
Temperature Range	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°C)
Humidity	Exterior: 100% condensing Interior: 30% to 95% non-condensing
Codes	Up to 50 user codes and 10 one-time user codes with optional programming code

Dimensions

Exterior   Interior

Traditional

Design	A	B	C	D
Exterior	2 ¹³⁄₁₆″ (71 mm)	5 ⅜″ (137 mm)	1″ (25 mm)	---
Interior	2 ¾″ (70 mm)	5 ½″ (140 mm)	1 ⅛″ (29 mm)	1 ¹¹⁄₁₆″ (43 mm)

Exterior   Interior

Contemporary

Design	A	B	C	D
Exterior	2 ¾″ (70 mm)	5 ³⁄₁₆″ (132 mm)	1″ (25 mm)	---
Interior	2 ¾″ (70 mm)	5 ½″ (140 mm)	1 ⅛″ (29 mm)	1 ¹¹⁄₁₆″ (43 mm)

Easy Installation

- Replace existing door hardware with just a Phillips screwdriver
- No hard wiring needed and fits all standard doors
- Download the free BILT. app featuring 3D instructions for quick and easy installation
- Operates on 4 AA batteries that will last for approximately 1 year

Innovative Security

- BHMA Grade 2 certified
- 20 Minute fire rating – UL certified
- Featuring SmartKey Security™

Finishes

9GED92700-001 Satin Nickel **15** TRL 15

9GED92700-002 Matte Black **514** TRL 15

9GED92700-003 Satin Nickel **15** CNT 15

9GED92700-004 Matte Black **514** CNT 514

FINISH AND
LIFETIME WARRANTY
MECHANICAL
ONE YEAR
ELECTRONIC WARRANT