
WEISER.

AURASpecifications





SATIN NICKEL

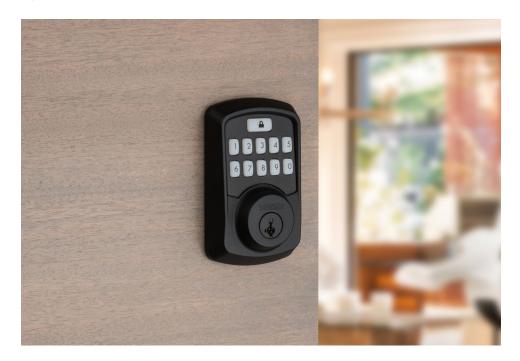

MATTE BLACK



GED18500		15 Satin Nickel	514 Matte Black	
Single Cylinder	GED18500			




SPECIFICATIONS

Battery	Uses 4 x AA 6V alkaline cell batteries with approximately 1 year battery life		
Function	Single cylinder deadbolt		
Door Prep	2 1/8" diameter bore hole & 1" diameter latch hole		
Backset	Adjustable 2 ¾" (60mm) or 2 ¾" (70mm)		
Door Thickness	1%" (35mm) - 2" (50mm) automatic adjustment		
Faceplates	1" (25 mm) x 2 ¼" (57 mm) square corner standard		
Strikes	Square corner, 4 hole strike, 2 3/4" (70mm) x 1 1/8"		
Latch	Square & drive-in adjustable 2 ¾" (60mm) or 2 ¾" (70mm)		
Bolt	1" (25 mm) throw, steel deadbolt		
Door Handing	Reversible		
Cylinder	SmartKey		
Security	Deadbolt: A156.36 Grade 2 Certified		
Temperature Range	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°C)		
Humidity	Exterior: 100% condensing Interior: 30% to 95% non-condensing		
UL	20 minute		
Codes	Up to 250 customizable access codes with optional schedules		

***	SMARTKEY
	SECURITY

Dimensions	Α	В	С	D
GED18500 Interior	2 3/4"	5 ¹³ /16"	2 1/8"	4 %16"
GED18500 Exterior	2 23/32"	4 5/8"	1 ³ /16"	



WARRANTY:

Weiser $^{\text{TM}}$ electronic products provide a "Lifetime Mechanical and Finish Warranty" and a one-year limited electronics warranty that covers all defects in material and workmanship. For more information, please visit ca.weiserlock.com/en/warranty/.