

ELEMENTS BY WEISER KEYPAD Specifications



SATIN NICKEL



MATTE BLACK




GED9240		Satin Nickel	Matte Black
Single Cylinder	GED9240 CNT	<input type="checkbox"/>	<input type="checkbox"/>
Single Cylinder	GED9240 TRL	<input type="checkbox"/>	<input type="checkbox"/>

SPECIFICATIONS


Battery	6V, 4 x AA alkaline batteries, 12-month battery life (batteries not included)
Door Prep	1 1/2" (38mm) or 2 1/8" (54mm) diameter cross bore hole and 1" diameter edge bore hole
Backset	Adjustable 2 3/8" (60mm) or 2 3/4" (70mm)
Door Thickness	1 3/8" (35mm) to 1 3/4" (44mm) standard. Thick door service part available for 2-1/4" (57mm) thick doors.
Faceplates	1" (25 mm) x 2 1/4" (57 mm) round corner faceplate with drive-in collar standard
Strikes	2 3/4" (70mm) x 1 1/8" (29mm) round corner 2-hole strike
Bolt	1" (25mm) throw, steel bolt
Door Handing	Reversible for right or left-handed doors
Cylinder	KW1 P&T cylinder
Security	Deadbolt: A156.36 Grade 3 Certified
Temperature Range	Exterior: -40F to 150F, Interior: 32F to 130F
Humidity	Exterior: 100% condensing, Interior: 30% to 95% non-condensing
Codes	Up to 12 user codes and 2 one-time user codes with optional programming code

Dimensions	A	B	C	D
GED9240 Contemporary Interior	2 23/32"	5 1/2"	1 5/32"	1 11/16"
GED9240 Contemporary Exterior	2 25/32"	4 7/32"	1 1/32"	---
GED9240 Traditional Interior	2 23/32"	5 1/2"	1 5/32"	1 11/16"
GED9240 Traditional Exterior	2 11/16"	4 7/16"	1 1/32"	---

Contemporary

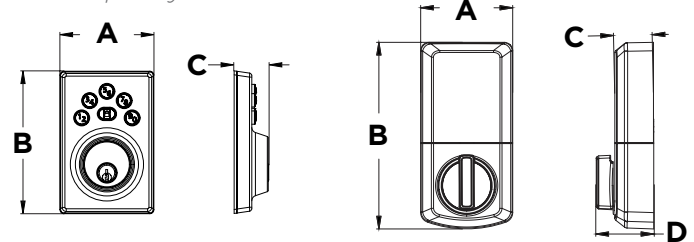

Traditional

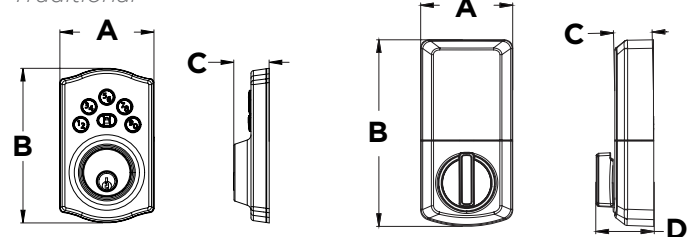

WARRANTY:

Weiser™ electronic products provide a “Lifetime Mechanical and Finish Warranty” and a one-year limited electronics warranty that covers all defects in material and workmanship. For more information, please visit ca.weiserlock.com/en/warranty/.