

HALO TOUCH Specifications



SATIN NICKEL



MATTE BLACK




GED3000		15 Satin Nickel	514 Matte Black
Single Cylinder	GED3000	□	□

SPECIFICATIONS

Battery	Uses 4 x AA 6V alkaline cell batteries with approximately 1 year battery life
Function	Single cylinder deadbolt
Door Prep	2 1/8" diameter bore hole & 1" diameter latch hole
Backset	2 3/8" (60mm) or 2 3/4" (70mm)
Door Thickness	1 3/8" (35mm) - 2" (50mm) automatic adjustment
Faceplates	1" (25 mm) x 2 1/4" (57 mm) square corner standard
Strikes	Square corner, 4 hole strike, 2 3/4" (70mm) x 1 1/8"
Bolt	1" (25 mm) throw, steel deadbolt
Door Handing	Reversible
Cylinder	SmartKey
Security	Deadbolt: A156.36 Grade 2 Certified
Temperature Range	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°C)
Humidity	Exterior: 100% condensing Interior: 30% to 95% non-condensing
UL	20 minute
Codes	Up to 100 fingerprints/50 users



Dimensions	A	B	C	D
GED3000 Interior	2 23/32"	5 25/32"	2 2/32"	1 13/32"
GED3000 Exterior	2 25/32"	3 9/16"	7/8"	--

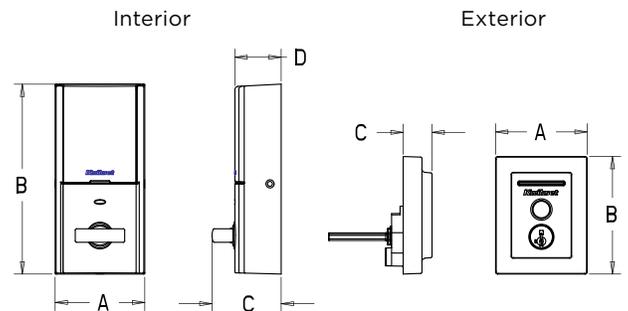

WARRANTY:

Weiser™ electronic products provide a “Lifetime Mechanical and Finish Warranty” and a one-year limited electronics warranty that covers all defects in material and workmanship. For more information, please visit ca.weiserlock.com/en/warranty/.