


POWERBOLT® 3 Specifications



LIFETIME BRASS



VENETIAN BRONZE



SATIN NICKEL



SATIN CHROME



MATTE BLACK




GED9250		3 Brass	11P Venetian Bronze	15 Satin Nickel	26D Satin Chrome	514 Matte Black
Single Cylinder	GED9250 TRS	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SPECIFICATIONS

Battery	6V, 4 x AA alkaline batteries, 12-month battery life (batteries not included)
Door Prep	1 1/2" (38mm) or 2 1/8" (54mm) diameter cross bore hole and 1" diameter edge bore hole
Backset	Adjustable 2 3/8" (60mm) or 2 3/4" (70mm)
Door Thickness	1 3/8" (35mm) to 1 3/4" (44mm) standard. Thick door service part available for 2-1/4" (57mm) thick doors.
Faceplates	1" (25 mm) x 2 1/4" (57 mm) Includes square corner and drive-in
Strikes	2 3/4" (70mm) x 1 1/8" (29mm) Square corner 2-hole strike
Bolt	1" (25mm) throw, steel bolt
Door Handing	Reversible for right or left-handed doors
Cylinder	SmartKey
Security	Deadbolt: A156.36 Grade 3 Certified
Temperature Range	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°)
Humidity	Exterior: 100% condensing Interior: 30% to 95% non-condensing
Codes	Up to 25 user codes and 5 one-time user codes with optional programming code



Dimensions	A	B	C	D
GED9250 Interior	2 7/8"	7 7/16"	1 3/4"	5 15/16"
GED9250 Exterior	2 3/4"	4 3/4"	1 15/16"	---

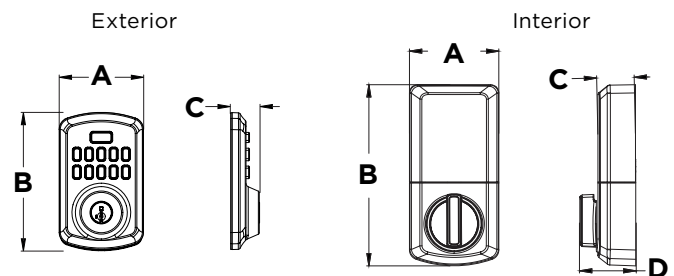

WARRANTY:

Weiser™ electronic products provide a “Lifetime Mechanical and Finish Warranty” and a one-year limited electronics warranty that covers all defects in material and workmanship. For more information, please visit ca.weiserlock.com/en/warranty/.