

SMARTCODE COMMERCIAL LEVER

Specifications



SATIN NICKEL



MATTE BLACK




GED2600		15 Satin Nickel	514 Matte Black
Single Cylinder	GED2600	<input type="checkbox"/>	<input type="checkbox"/>

SPECIFICATIONS

Battery	Uses 1 x 9V alkaline cell battery with approximately 3 year battery life
Function	Keyed entry electronic lever
Door Prep	2 1/8" (54mm) diameter face hole and 1" diameter latch hole
Backset	Adjustable 2 3/8" (60mm) or 2 3/4" (70mm)
Door Thickness	1 3/8" (35mm) to 1 3/4" (44mm) standard
Faceplates	1" (25 mm) x 2 1/4" (57 mm) square corner standard
Strikes	2 3/4" (70mm) x 1 1/8" (29mm) square corner, 4 hole strike
Bolt	1/2" (12 mm) throw, dead latch
Door Handing	Reversible
Cylinder	SmartKey
Security	Deadbolt: A156.36 Grade 2 Certified
Temperature Range	Exterior: -40°F to 150°F (-40°C to 66°C) Interior: 32°F to 130°F (0°C to 54°C)
Humidity	Exterior: 100% condensing Interior: 30% to 95% non-condensing
UL	20 minute
Codes	Up to 30 user codes and 1 one-time user code with optional programming code



Dimensions	A	B	C	D
GED2600 Interior	5 5/8"	5 5/16"	2 7/8"	1 31/32"
GED2600 Exterior	5 3/4"	5 31/32"	3 5/16"	1 13/32"

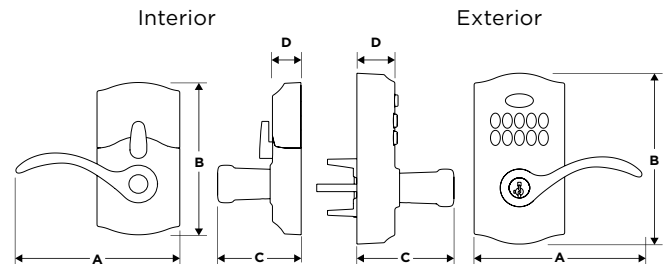

WARRANTY:

Weiser™ electronic products provide a “Lifetime Mechanical and Finish Warranty” and a one-year limited electronics warranty that covers all defects in material and workmanship. For more information, please visit ca.weiserlock.com/en/warranty/.