

## DAYLON ROUND ROSE

Box Pack Specifications



SATIN NICKEL



SATIN CHROME



POLISHED CHROME



MATTE BLACK

### AVAILABLE FUNCTIONS:





Passage



Privacy




Inactive

DAL		 20 min.	 3 Hour	Satin Nickel	Polished Chrome	Satin Chrome	Matte Black
Passage	SL1000DAL RDT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Privacy	SL3000DAL RDT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Inactive	SL7000DAL RDT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Passage 3HR UL	SL1002DAL RDT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



## SPECIFICATIONS

<b>Door Prep</b>	Cross Bore 2-1/8" Edge Bore 1" Latch Face 1"x2-1/4"
<b>Backset</b>	Adjustable to 2-3/8" or 2-3/4"
<b>Door Thickness</b>	1-3/8"-1-3/4" doors standard thickness
<b>Cylinder</b>	P&T(5 pin).
<b>Faceplates</b>	1"x2-1/4" Must specify square radius or drive-in
<b>Strikes</b>	2-1/4" full lip. Specify round corner or square corner
<b>Bolt</b>	1/2" throw. Nickel plated
<b>Door Handing</b>	Reversible for right or left-handed doors
<b>ANSI/BHMA</b>	A156.5 Grade 3
<b>ADA</b>	N/A
<b>UL</b>	Meets UL 3 hour fire rating for all UL functions
<b>ASTM</b>	All Weiser product meets ASTM E 331 water penetration testing

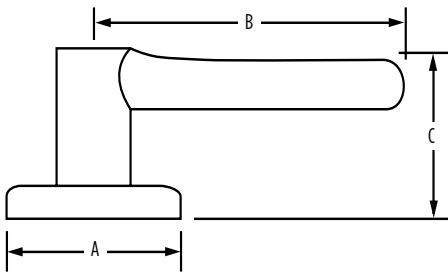

Dimensions	A	B	C	C (Keyed)
Daylon (Round Rose)	2 9/16"	3 5/8"	2 3/8"	

## WARRANTY:

Safelock by Weiser™ products provide a "Lifetime Mechanical & 5 Year-Limited Finish Warranty" that covers all defects in material and workmanship. For more information, please visit [ca.weiserlock.com/en/warranty/](http://ca.weiserlock.com/en/warranty/).